



Super Solo

LED Warning light

FLASH PATTERNS

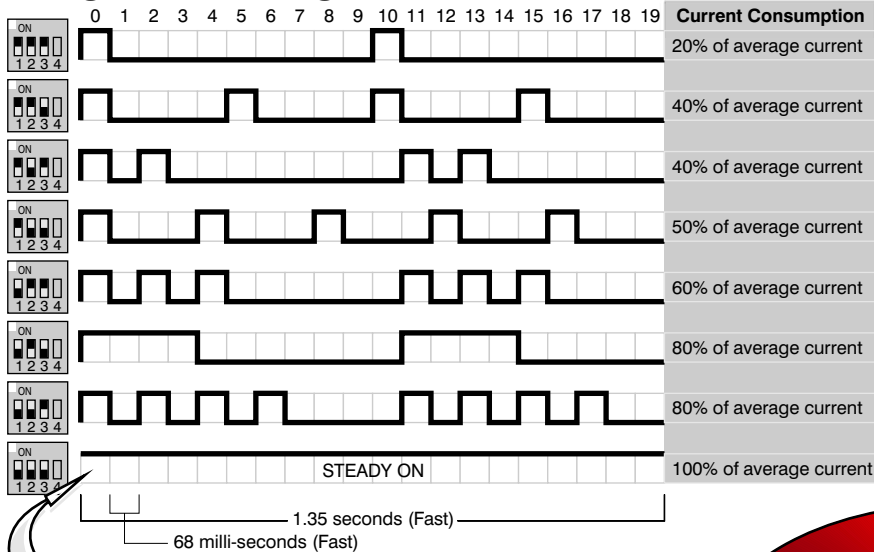

As per table

Now also with Steady on state

AVERAGE CURRENT

	12	24	72	115	230
Voltage	12±10%	24±10%	72±10%	115±10%	230±10%
Average	280mA	360mA	30mA	35mA	30mA
Peak	560mA	720mA	60mA	70mA	60mA

See pattern table for current consumption with various patterns

ORDER No.

SLF - B

Voltage: 230
 115
 72
 24
 12

Polarity: B AC/DC

FEATURES:

- High Brightness.
- AC or DC Powered.
- Solid state construction.
- Impact resistant enclosure.
- Low Current Consumption.
- Shock and vibration resistant.
- Available with cable gland entry & wire.
- 15 Selectable flash-rate/Pattern combinations.
- Base-mounting via screws on any flat surface.
- Life expectancy >150 000 hours at 70% duty cycle.

