


PILOT LIGHT

A0271

Cutout : 29.5 x 21.5mm
 Lamp
 Voltages : Midget Groove Lamp or LED (MG T1¼)
 Lamp : 14, 28, 48, 50 & 60V AC/DC
 Neon : 110, 220V AC Red
 Flourescent : 110, 220V AC Green
 LED : 6 chip 12, 24 & 48V AC/DC
 Red, Green or Yellow
 LED : 1 chip 24V DC - Red, Green, Yellow or White.
 Colours: Red, Green or White (Other colours available ex - indent)





PUSHBUTTONS

A0201Y (momentary) A0201X (maintained)(ex-indent)

Cutout : 29.5 x 21.5mm
 Lamp
 Voltages : Midget Groove Lamp or LED (MG T1¼)
 Lamp : 14, 28, 48, 50 & 60V AC/DC
 Neon : 110, 220V AC Red
 Flourescent : 110, 220V AC Green
 LED : 6 chip 12, 24 & 48V AC/DC
 Red, Green or Yellow
 LED : 1 chip 24V DC - Red, Green, Yellow or White.
 Colours: Red, Green or White (Other colours available ex - indent)

A02505


1n/o 1n/c contact block

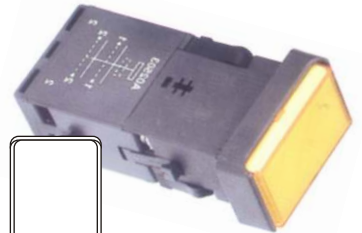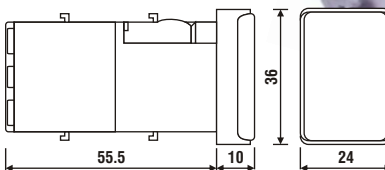

EMERGENCY STOP SWITCH

A01ES

Cutout: 16mm
 Colour: Red actuator, Grey body
 Contact Blocks: (see pg 2.6)
 Operation: Latching, twist to release

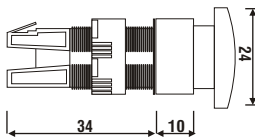

SELECTOR SWITCHES

A019.... (Round) (Short handle)

Cutout: 16mm
 Colour: Grey
 Contact Blocks: (see pg 2.6)
 Positions:

A019606



(Long handle)


A019509 A019505 A019508



(Short handle)



(Long handle)



A019.... (Square) (Short handle)


Cutout: 16mm
 Colour: Grey
 Contact Blocks: (see pg 2.6)
 Positions:

A019409 A019405 A019406



(Long handle)

A019309 A019305 A019308



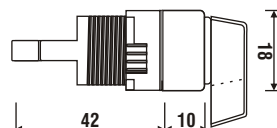


APEM

KEY SWITCHES



A018.... (Round)

Cutout: 16mm
 Colour: Grey
 Contact Blocks: (See below)
 Positions:

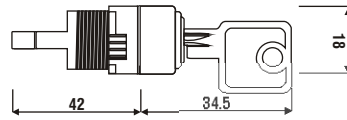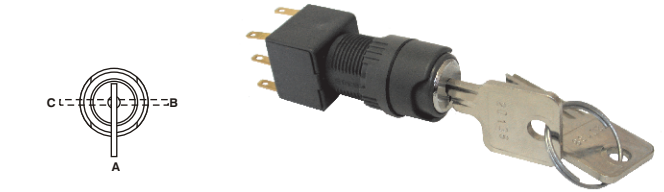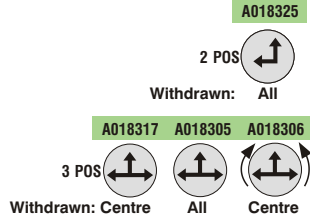

A018.... (Square)


Cutout: 16mm
 Colour: Grey
 Contact Blocks: (See below)
 Positions:

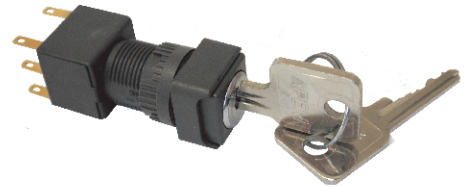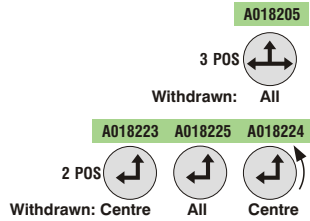

CONTACT BLOCKS

A0151B (1 c/o)


Contacts: Silver, gold plated
 Rating: Min 10mA@ 5V AC
 Max 6A @250V AC

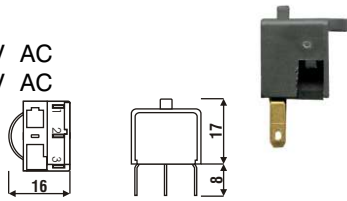

Accepts 2.8x0.5mm Faston ferrules

A0152B (2 c/o)


Contacts: Silver, gold plated
 Rating: Min 10mA@ 5V AC
 Max 6A @250V AC

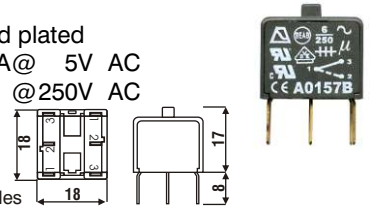


Accepts 2.8x0.5mm Faston ferrules

A0153B (4 c/o)

Contacts: Silver, gold plated
 Rating: Min 10mA@ 5V AC
 Max 6A @250V AC

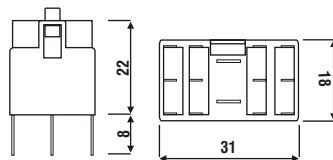

Accepts 2.8x0.5mm Faston ferrules

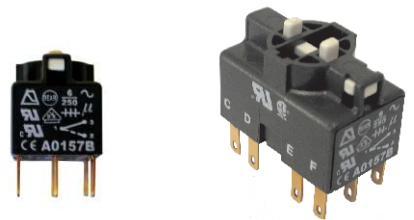

ACCESSORIES

30-0001



Fixing Nut Key

LZ5



Combined Lamp & Lens Remover

30-0006



Screen Remover