

LEGENDS & TERMINALS

AR-62 Name plate
Large



AR-63 Ring type
name plate
Standard



AR-65
Ant-revolution
Ring for
square type



AR-66
Anti-Revolution
Ring for
Round type



AR-81
Lamp
replacement
tool




AR-82 Nut tightening tool



HYT-10

MODEL	SIZE	MONTING WIDTH	HOLE
HYT-1010	10A10P	102.5	3.7
SCREW	VOLTAGE	CURRENT	
M3	600V	10A	

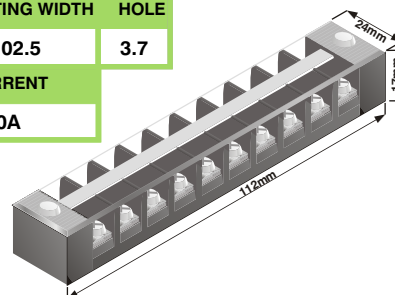

AR-83 Lamp button
replace tool



HYBT-15



HYBT-15-2



DIN RAIL TERMINAL
BLOCKS

MODEL	VOLTAGE	CURRENT	SIZE
HYBT-15 HYBT-15-2	600V	15A	3.6

HYBT15 - EP

HYBT15 - EP - 2

END PLATE



HYBT07

STOPPER



HYBT08

COVER



HYF15-3-220A

Triple fuse holder with
LED indication
220VAC - 15A



HYF15-1-24D

HYF15-1-220A

Single fuse holder with
LED indication.

24VDC - 10A
220VAC - 15A



45

58

16



TOP HAT DIN RAIL MOUNTING
LED INDICATION OF FUSE FAILURE

POWER PUSH BUTTON SWITCHES

HY512

Rating: 2P 250V 15A
Usage: 1 phase switching



HY513


Rating: 3P 250V 15A
Usage: 3 phase switching

HY512 S

Rating: 2P 250V 15A - Lamp s/w 2A
Usage: 1 phase switching

HY513 S

Rating: 3P 250V 15A - Lamp s/w 2A
Usage: 3 phase switching




HOIST SWITCHES

Rating: 250VAC 5A
(IP65)

102T

2 Speed contact for 2 pushbuttons

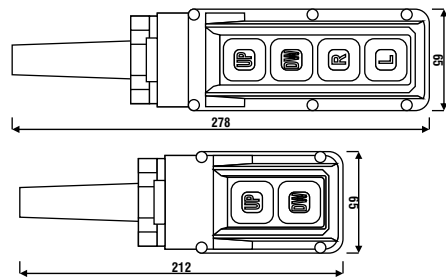

HY-1022

2 CONTACT

HY-1024

4 CONTACT

HY-1026

6 CONTACT

HY-1028

8 CONTACT




PROXIMITY SENSORS


DC SENSOR, SQUARE TYPE

CODE	HYP-18S5	HYP-25S12	HYP-30S15
SENSING DISTANCE	5mm±10%	12mm±10%	15mm±10%
MOUNTING DISTANCE	0 ~ 4mm	0 ~ 9.6mm	0 ~ 12mm
OBJECT	STEEL 18x18x1	STEEL 35x35x1	STEEL 45x45x1
SWITCHING FREQUENCY	500Hz	200Hz	100Hz
OUTPUT CURRENT	MAX. DC 200mA		
POWER	DC12~24V(DC10~30V)		
RESIDUAL VOLTAGE	1V MAX.		
POWER CONSUMPTION	DC 10mA MAX.(DC12V)		
LEAKAGE CURRENT	DC 0.5mA MAX.		
INSULATION RESISTANCE	500M MIN. AT DC 500V		
DIELECTRIC STRENGTH	AC 1000V FOR 1 MINUTE		
AMBIENT TEMPERATURE	-25℃ ~ 70℃		
DEGREE OF PROTECTION	IP67 (IEC)		
PROTECTION CIRCUIT	SURGE PROTECTION / REVERSE POLARITY PROTECTION		
OPERATION LAMP	RED (LED)		
VIBRATION	10 ~ 55Hz DOUBLE AMPLITUDE 1.5mm X.Y.Z. EACH DIRECTION FOR 2 HOURS		
SHOCK	500 m / s ² (APPROX. 50g) X.Y.Z. EACH DIRECTION FOR THREE TIMES		
MATERIAL	CASE: ABS RESIN, FACE: ABS RESIN		

SUITABLE FOR VARIOUS LIMIT & COUNTING CONTROL
SENSORS ARE TOTALLY SEALED & CAN OPERATE
IN THE MOST DEMANDING ENVIRONMENTS
200mA MAXIMUM CONTROL OUTPUT
REVERSE POLARITY PROTECTION
SURGE PROTECTION



HYP-18S5PAF
HYP-18S5PAU
HYP-18S8PAF
HYP-18S8PAU



HYP-25S12PAF

HYP-30S15PA

HYP-25S5PAF



EX INDENT AVAILABLE TYPES INCL.: ROUND METAL, PNP, AC & CAPACITIVE TYPES.
FUTURE EDITIONS OF OUR CATALOGUE WILL CONTAIN MORE INFO. & SPECS ON SENSORS.