
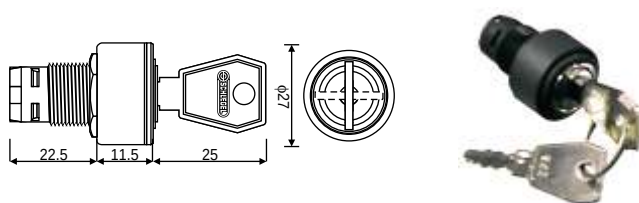


KEY SWITCHES

RXSSA.... (Charcoal)

Cutout: $\phi 16.2\text{mm}$
 Rating: IP65
 Contact Blocks: See page 2.11


- Reversible key
- Standard types have identical keys.
- Special key numbers on request.



RKSSA28 (Charcoal)

Cutout: $\phi 16.2\text{mm}$
 Rating: IP65
 Contact Blocks: BT, BTL5 or BTLI5 on page 2.11



- The standard types have identical keys.
- Up to 20 different key numbers available on request.

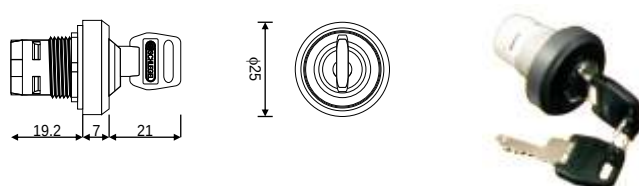

FLUSH-MOUNT KEY SWITCHES

RXJSSA.... (Charcoal)



Cutout: $\phi 22\text{mm}$
 Rating: IP65
 Contact Blocks: See page 2.11

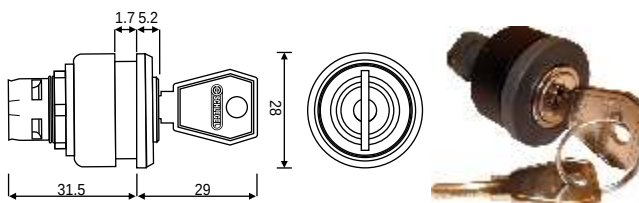

QXJSSA.... (Black)



Cutout: 24x24mm
 Rating: IP65
 Contact Blocks: See page 2.11

- Reversible Key
- The standard types have identical keys
- Special key numbers on request

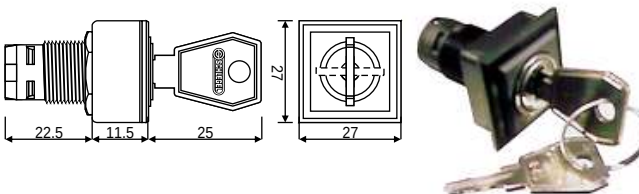


QXJSSKA-17E (Black)

Specs as above but with a keyhole cover.

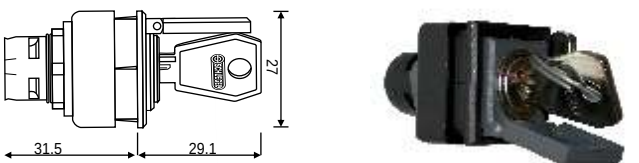


CONTACT BLOCKS


BT 1N.O+1N.C Momentary
BTL5 1N.O+1N.C Momentary (Illuminated)
BTLI5 2N/C Momentary (Illuminated)
 Lampholder W 2 x 4.6 d (wedge base)
 Voltage: 5A @ 250V
 Used for RKSSA28 only




CTLP
 1N.O+1N.C
 Illuminated snap action
 contact block.
 With T5,5K lamp holder



AT 1N.O+1N.C Momentary
ATO 1N.C Momentary
AT1 1N.O Momentary
AT2 2N.O+2N.C Momentary
ATO1 2N.O+1N.C Momentary
AZ2 2N.O+2N.C Momentary (for 3-pos.switches)
AF 1N.O+1N.O Maintained
AFL 1N.O+1N.O Maintained
 Voltage: 5A @ 250V



ATL 1N.O+1N.C Momentary
ATL2 2N.O+2N.C Momentary
AFL 1N.O+1N.C Maintained
AFL2 2N.O+2N.C Maintained
 Illuminated Contact blocks with T5.5K lampholder.
 Voltage: 5A @ 250V
 Technical Data - Lamps:-
 Lamp Socket: T5.5K
 Lamp Voltage: max.60V
 Lamp Output: max.1.2W



(Or see LED lamp replacement table [Section 1] page for LED options)