


IP67 PUSHBUTTON

QXDMDG (Charcoal)


Cutout: 16.2mm
 Rating: IP67
 Short stroke pushbutton head with transparent silicone protection cap & blank nameplate.
 Contact blocks: See electronic (snap action) contact blocks **CTP** & **CTLP**
 Colours: Red, Green, Yellow, Blue or Clear



FLUSH-FIT ILLUMINATED PUSHBUTTON

RXJT (Charcoal)

Cutout: 22.3mm
 Rating: IP65
 Contact Blocks: See below for other options
 Lenses: Please see below for lens options (High or Flat)
 Colours: Red, Green, Yellow, Blue, Clear or Opaque White
 Nameplate: See below

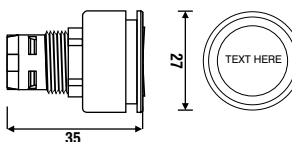

TRANSPARENT PUSH-CAP LENSES

NAMEPLATES

KH20... (HIGH)



T20F... (FLAT)



BSRXU (BLANK)


BSRX... (TEXT)



ILLUMINATED PUSHBUTTON

QXT (Black)


Cutout: 16mm
 Rating: IP65
 Contact Blocks: See below for other options
 Lenses: **T25F...** (Flat)
T25D... (Concave)
 Colours: Red, Green, Yellow, Blue or Clear
 Nameplate: **BSQXU** (White Blank)



FLUSH-MOUNT ILLUMINATED PUSHBUTTONS


QXJD (Black) (Short-stroke pushbutton head)

Cutout: 24x24mm
 Rating: IP65
 Contact Blocks: See below for other options
 Lenses: **T25F...** (Flat)
T25D... (Concave)
 Colours: Red, Green, Yellow, Blue or Clear
 Nameplate: **BSQXU** (White Blank)

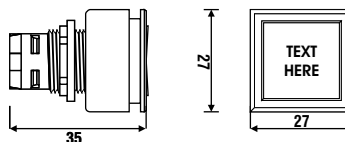

QXJT (Black)

Cutout: 24x24mm
 Rating: IP65
 Contact Blocks: See below for other options
 Lenses: **T25F...** (Flat)
T25D... (Concave)
 Colours: Red, Green, Yellow, Blue or Clear
 Nameplate: **BSQXU** (White blank)

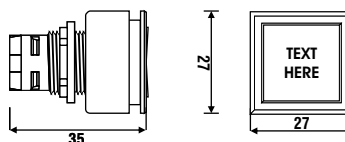

QXJTLL (Black)

Cutout: 24x24mm

Rating: IP65

With lamp in mid-position and exchangeable from the front. Two prisms reflecting the light from the push-cap area to the border of the cap where it is concentrated.


Contact Blocks: See below for other options

Lenses: T25F....(Flat)

T25D....(Concave)

Colours: Red, Green, Yellow, Blue or Clear

Nameplate: BSQXLLU (White blank)

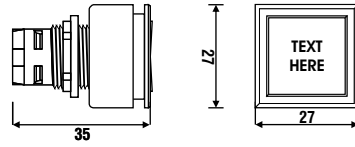


CONTACT BLOCKS

BT 1N.O+1N.C Momentary
BTL5 1N.O+1N.C Momentary (Illuminated)
BTLI5 2N/C Momentary (Illuminated)

Lampholder W 2 x 4.6 d (wedge base)

Voltage: 5A @ 250V

•Used for RKSSA28 only•

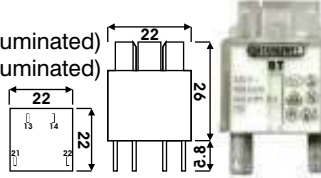


CTLP

1N.O+1N.C


Illuminated snap action contact block.

With T5,5K lamp holder



AT 1N.O+1N.C Momentary
ATO 1N.C Momentary
AT1 1N.O Momentary
AT2 2N.O+2N.C Momentary
ATO1 2N.O+1N.C Momentary
AZ2 2N.O+2N.C Momentary (for 3-pos.switches)
AF 1N.O+1N.O Momentary
AFL 1N.O+1N.O Maintained

Voltage: 5A @ 250V



ATL 1N.O+1N.C Momentary
ATL2 2N.O+2N.C Momentary
AFL 1N.O+1N.C Maintained
AFL2 2N.O+2N.C Maintained

Illuminated Contact blocks with T5.5K lampholder.


Voltage: 5A @ 250V

Technical Data - Lamps:-

Lamp Socket: T5.5K

Lamp Voltage: max.60V

Lamp Output: max.1.2W



(Or see LED lamp replacement table [Section 1] page for LED options)

SPECIAL STEEL ILLUMINATED PUSHBUTTON

RVATL....


Cutout: 22.3mm

Rating: IP65

The RVA series now meet the requirements for hygienic applications.

Contact Blocks: See previous page

Colours: Green and Blue (Red, Yellow & White ex-indent)



MTI

Modular contact block.

1N.O Momentary

MFL

Modular latching lamp holder with BA9S lamp holder



MHR3

Contact block holder for 3 modules.

