



The ND22 series indicators adopt super bright LED technology with low energy consumption. The special locking nut structure allows this indicator to be used for either a 22.5mm or a 25.5mm panel cut-out. Degree of protection is IP65. (The LED is not replaceable).

ND22-BS	AC/DC 6V (ex indent)
ND22-BS	AC/DC 12V
ND22-BS	AC/DC 24V
ND22-BS	AC/DC 36V
ND22-BS	AC/DC 48V
ND22-B	AC/DC 110V
ND22-B	AC/DC 220V
ND22-B	AC 380V (ex indent)

Colours: Red, Green, Yellow, Orange, Blue or White.



A

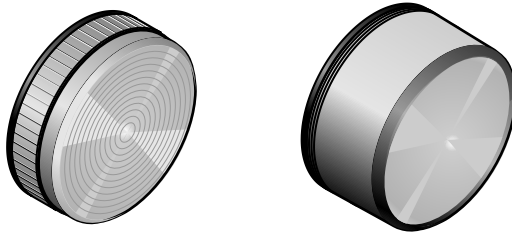


A

B

Two types of lens are available for all models.

- a) Low profile translucent fresnel type.
- b) Medium profile fully diffused smooth type.
- c) 30mm adaptor available - see YADP30

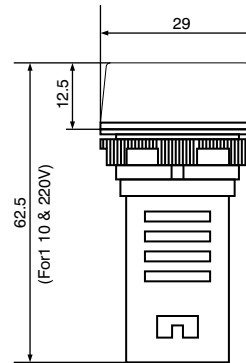


B



Cutout: 22mm
30mm adaptor available - see YADP30 on page 1.4


EV161	White, Direct Connection, 6~380V
EV163	Green, Direct Connection, 6~380V
EV164	Red, Direct Connection, 6~380V
EV165	Yellow, Direct Connection, 6~380V
EV166	Blue, Direct Connection, 6~380V



BA9S Lamp Holder(see LED Lamp Replacement Table for options)

Cutout: 22mm


BV61	White, Direct Connection, 6~380V
BV63	Green, Direct Connection, 6~380V
BV64	Red, Direct Connection, 6~380V
BV66	Blue, Direct Connection, 6~380V
BV65	Yellow, Direct Connection, 6~380V
BV66	Blue, Direct Connection, 6~380V
BV71	White, Resistance, 220V , Supplied with a 110V BA9S Red Neon
BV73	Green, Resistance, 220V , Supplied with a 110V BA9S Green Fluorescent
BV74	Red, Resistance, 220V , Supplied with a 110V BA9S Red Neon
BV75	Yellow, Resistance, 220V , Supplied with a 110V BA9S Red Neon
BV76	Blue, Resistance, 220V, Supplied with a 110V BA9S Red Neon.

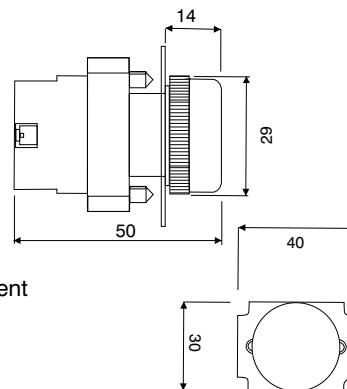

BA9S Lamp Holder(see LED Lamp Replacement Table for options)

APL22....

Cutout: 22mm
30mm adaptor available - see YADP30



Lens colours: Red, Green, Yellow, Orange, Blue, White or Clear
BA9S Lamp Holder (See LED Lamp Replacement Table for options).